


# FA-120Z/FA-240Z/FA-350Z/FA-500Z

## 3 Zone Mixer Amplifier with Mp3 & Tuner & Bluetooth (Separate Zone Volume Control)

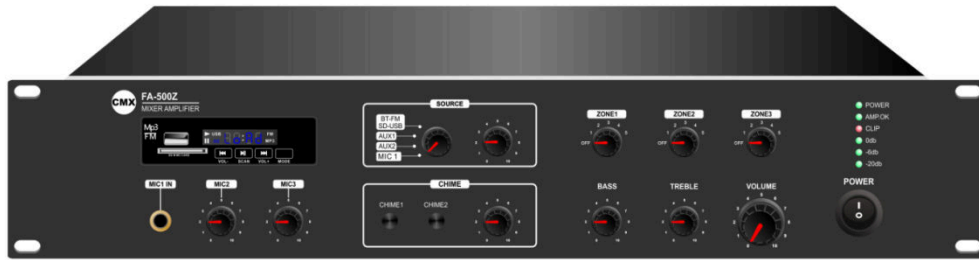

### Features:

- ✓ Public address (PA) 3 zone mixer amplifier.
- ✓ 19" rack mount amplifier of 2U height.
- ✓ Rated outputs of 120W, 240W, 350W to 500W.
- ✓ 3 zone speaker outputs of 100V.
- ✓ One zone speaker outputs of 40hm-80hm-160hm-70V-100V.
- ✓ 3 zone speaker outputs with independent volume control.
- ✓ Built-in MP3 player by USB & SD, FM tuner, blue tooth .
- ✓ With IR remote control to switch source and volume control.
- ✓ Three microphone inputs, Mic1(6.3mm) and Mic/Line input 2-3 (XLR).
- ✓ Mic2-3 of balanced input with mic/line switch and 48V phantom power.
- ✓ Aux 1-2 inputs on rear panel by RCA.
- ✓ Microphone1 of VOX features of highest input priority except EMC input.
- ✓ With two pre-announcement chime and volume control.
- ✓ Overload, short circuit and high temp protection.

### Rear Panel:



### Specification:

Model	FA-120Z	FA-240Z	FA-350Z	FA-500Z
Description	3 Zone Mixer Amplifier with Mp3 & Tuner & Bluetooth			
Rated Power Output	120W RMS	240W RMS	350W RMS	500W RMS
Speaker Output	3 zone speaker outputs of 100V One zone speaker outputs of 40hm-80hm-160hm-70V-100V			
Input	Mic1-3: 2.5mV, Aux1-2: 250mV			
Frequency Response	80-16KHz			
THD	<0.1%			
S/N Ratio	>70dB			
Protection	High temp, short circuit, clip & overload protection			
Power Supply	AC230V or AC110V, 50-60Hz			
Power Consumption	200W	400W	500W	650W
Dimension	418(W)×318(D)×88(H)mm			
Weight	9.5kg	12kg	13kg	14.5kg