


DESCRIPTION

The TOA AT-303P is a flush-mounted wall attenuator and uses a transformer which allows connection of a wide range of loads (under 30W). Volume can be adjusted in five steps. The AT-303P features push-in terminals, each of which accepts two conductors for easy bridging.


SPECIFICATIONS

Input Range	0.5 W ~ 30 W
Attenuation	5 steps (0dB, -6dB, -12dB, -18dB, OFF)
Usable Cable	600 V vinyl-insulated cable (Indoor Vinyl or Heat-resistant Indoor Vinyl cable) Solid cable : ϕ 0.8 ~ ϕ 1.2 mm Stranded cable (7 cores) : 0.75 ~ 1.25 mm ²
Terminal	Push-in connector (bridging terminal)
Finish	Knob / Panel / Plate : ABS resin, milk white Case : ABS resin, black
Accessory	M4 × 35 screw.....2 Plate.....1, M3.5 × 5 screw.....2


APPEARANCE

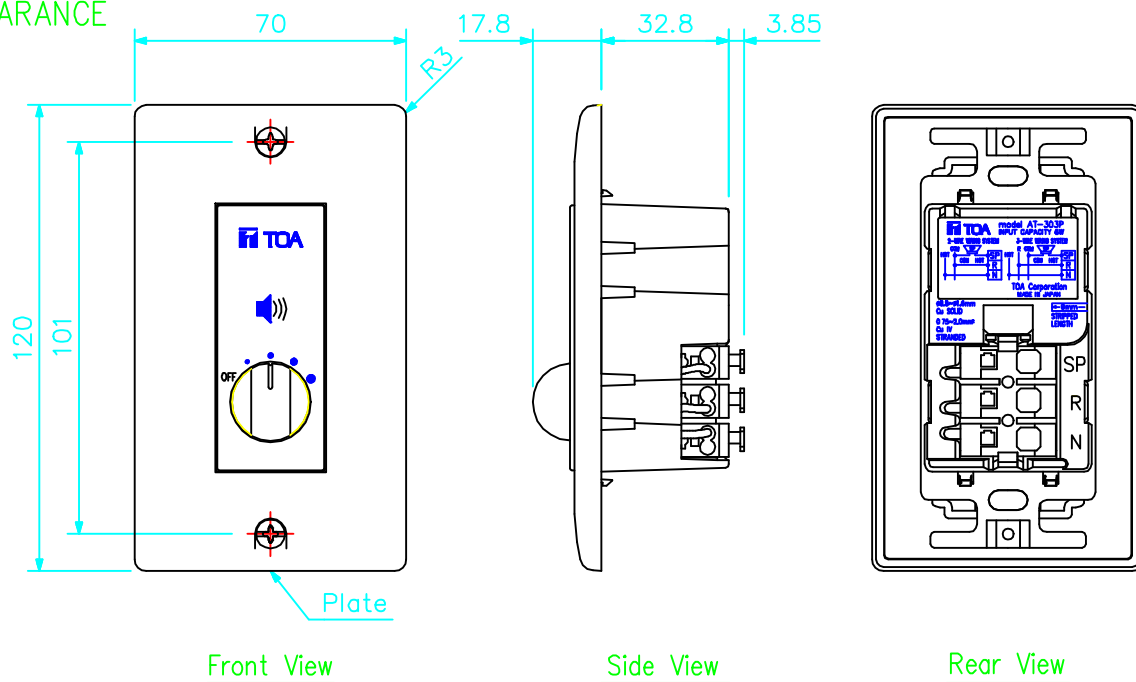

Speaker Output

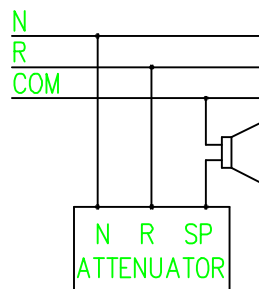

3-WIRE CONNECTION

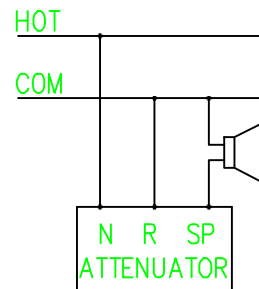

2-WIRE CONNECTION

UNIT:mm SCALE:1/2