



## KEY FEATURES

- Plug and Play 2 Port DMX Node for ONYX
- USB powered
- DMX In/Out and RDM support
- Expand any ONYX console or PC system
- Rugged design

## SPECIFICATIONS

### **NX DMX SPECIFICATIONS**

#### **CONTROL/USER INTERFACE**

- Windows 10
- Intel Core i3 processor 6th Generation+
- 4 GB RAM
- 2 GB available disk space (SSD recommended)
- Widescreen monitor, minimum 1280 wide, 768 high (capacitive multi-touchscreen recommended)
- USB 2.0 port for Onyx Key and optional USB to DMX devices
- 10/100 Ethernet port for Art-Net DMX output
- 100/1000 Ethernet port for X-Net, Remote operation and sACN
- NX DMX is also compatible with Elation LightJockey 2 Software

#### **SOFTWARE**



Operating the NX DMX with ONYX requires the use of a Windows PC running ONYX, which can be downloaded from the support website <http://support.obsidiancontrol.com>.

You must update your controller to the latest version of ONYX before using it for the first time, and periodically check the website for updates.

NX DMX

**CONNECTIONS**

2x DMX / RDM Universe In/Out: 5pin locking XLR  
USB In: USB 2.0 B

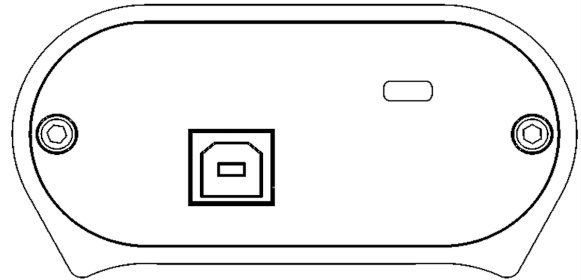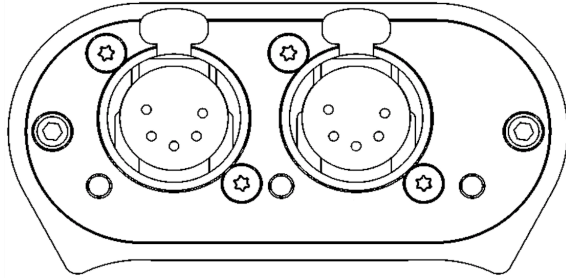

**PHYSICAL**

Length: 92 mm (3.7 in.)  
Width: 82 mm (3.3 in.)  
Height: 41mm (1.7 in.)  
Weight: 245g (0.6 lbs.)

**ELECTRICAL**

5V over USB  
100-240V nominal, 50/60 Hz  
Maximum current: 300 mA

**ORDERING**

INCLUDED ITEMS  
Obsidian USB Cable

SKU  
US #: NXD986  
EU #: 1330000049

