



## SR-S4L/S4LWP

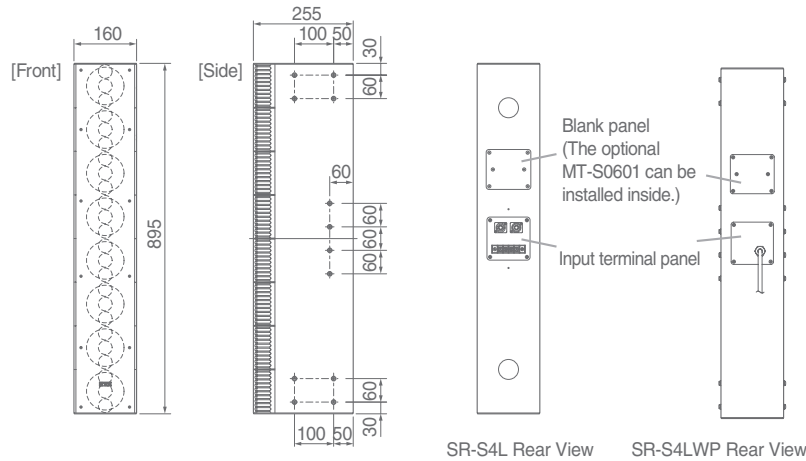

## SR-S4S/S4SWP

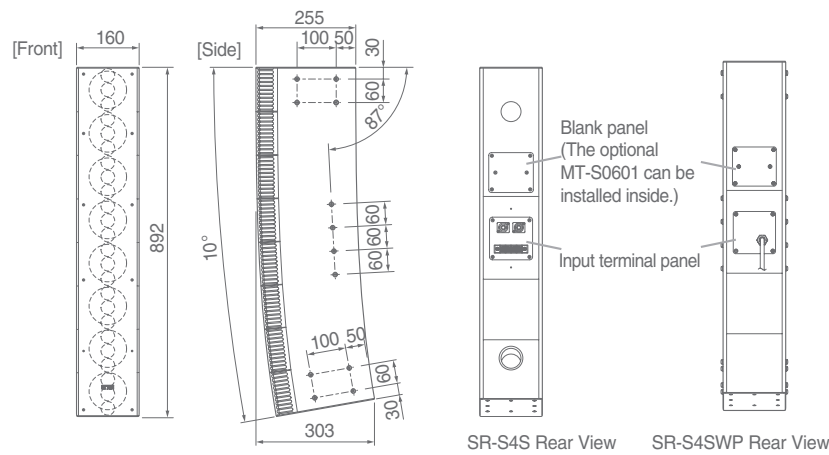

Specifications	SR-S4L	SR-S4LWP	SR-S4S	SR-S4SWP
Enclosure	Bass-reflex type	Sealed type	Bass-reflex type	Sealed type
Power Handling Capacity	Continuous program: 600W (single-amp mode) Low 240W, High 240W (bi-amp mode)			
Rated Impedance	8 Ω (single-amp mode) / Low 8 Ω, High 8 Ω (bi-amp mode)			
Sensitivity (1W, 1m)	94 dB		93 dB	
Max SPL (Rated input, 1m)	122 dB		121 dB	
Crossover Frequency	3.5 kHz			
Frequency Response	70 Hz – 20kHz			
Directivity Angle	H: 90 deg., V: 0 deg.		H: 90 deg., V: 10 deg.	
Speaker Component	Low: 4" cone-type x 8, High: 1" balanced dome-type x 24		Low: 4" cone-type x 8, High: 1" balanced dome-type x 24	
Input Connector	M5 screw terminal, distance between barriers: 12.2 mm and Neutrik NL4MP x 2	Direct cable withdrawal from internal speaker : ø8.6 mm, conductor cross section: 1.25 mm <sup>2</sup> , 4-core cable, 3 m	M5 screw terminal, distance between barriers: 12.2 mm and Neutrik NL4MP x 2	Direct cable withdrawal from internal speaker : ø8.6 mm, conductor cross section: 1.25 mm <sup>2</sup> , 4-core cable, 3 m
Water Protection	-	IPX4	-	IPX4
Finish	Enclosure: MDF, white, paint Front grille: Punched steel plate, white, acrylic paint	Enclosure: Plywood, white, urethane coating Front grille: Punched stainless steel, white, paint	Enclosure: MDF, white, paint Front grille: Punched steel plate, white, acrylic paint	Enclosure: Plywood, white, urethane coating Front grille: Punched stainless steel, white, paint
Dimensions (W x H x D)	160 x 895 x 255 mm		160 x 892 x 303 mm	
Weight	16 kg			
Accessory	Bi-amplifier drive rating label x 1, Bi-amplifier drive input indication label x 1			
Option	Matching transformer: MT-S0601, Digital speaker processor: DP-SP3			
	Extension plate: SR-EP4, Flying bracket: SR-FB4, Wall mounting bracket: SR-WB4, Wall tilt bracket: SR-TB4, Stand adapter, SR-SA4, Protection pad: SR-PP4, Floor stand: SR-FS4	Extension plate: SR-EP4WP, Wall mounting bracket: SR-WB4WP, Wall tilt bracket: SR-TB4WP, Protection pad: SR-PP4	Extension plate: SR-EP4, Flying bracket: SR-FB4, Wall tilt bracket: SR-TB4, Stand adapter, SR-SA4, Protection pad: SR-PP4	Extension plate: SR-EP4WP, Wall tilt bracket: SR-TB4WP, Protection pad: SR-PP4